

EVOLO Emergency Exit 32m

EVOLO Emergency Exit is designed with a die-cast aluminium body and high impact polycarbonate clear diffuser with IP66 and IK08 protection suitable for installation in tunnels, railways and harsh environments. It is illuminated in operation allowing a clear indication of emergency escape route.

FEATURES AND BENEFITS

- Powdercoated white body
- 32m Viewing Distance
- Easy access M20 cable entry for top or side entry
- Easy removable decals and gear tray for quick replacement
- Optional features
 - Double Sided
 - Decal Running Man with Arrow
 - Dali Emergency for maintenance and operations



PRODUCT CODE	LENGTH	WIDTH	HEIGHT
EVOXRESS	420	230	84

Single Sided Exit. Dimensions in MM




PRODUCT CODE	LENGTH	WIDTH	HEIGHT
EVOXREDS	420	230	99

Double Sided Exit. Dimensions in MM




OPTIONAL ACCESSORIES

- Surface mounting wall brackets (standard)
- Universal Mounting Bracket - top and bottom bracket piece with bracket screws

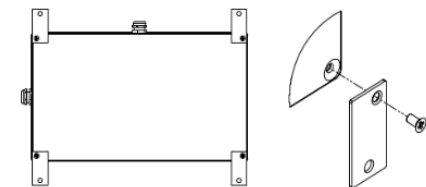

Wall Mount Brackets



Universal Mounting Bracket

EVOLO Emergency Exit 32m

Family Name	Evolu Emergency
Product Code	EVOXRE
Body Colour	White Powdercoated
Power Rating	6.5 W
Power Supply	230 V AC
LED Chip	Samsung/Osram
CCT	4000 K
Ambient Temperature	Ta 40°C
IK Rating	IK 10
IP Rating	IP 66
Fitting Weight	4.0 kg
Installation	Wall Mount/Side Mount/Ceiling Mount
Applications	Roads & Rail Tunnels Underpasses
Standards	AS/NZ 60598 General Requirement and Tests AS/NZ 2293 Emergency Escape Lights
Photometric Data	Available by Request



LED light source inside. We do not recommend service or maintenance in situ or on site. To ensure ongoing integrity and functionality LED luminaires shall be serviced or maintained by a competent person in a clean workshop environment free from dust, dirt and moisture.

SPECIFICATIONS MAY BE SUBJECT TO CHANGE