

# EVOLO Exit with Downlight & Strobe 32m

EVOLO Triangular Exit Sign is illuminated with an additional 4000K downlight is fitted for use in humid and tunnel application environments. Accompanied with industrial grade amber strobe for flashing visibility in emergency situations.


## FEATURES AND BENEFITS

- Triangular Exit Sign with extra 4000K Downlight
- 90fpm Amber Strobe
- Powdercoated White Body & Frame
- 32m Viewing Distance
- Easy access rear M20 cable entry




| PRODUCT CODE | LENGTH | WIDTH | HEIGHT |
|--------------|--------|-------|--------|
| EVOEXL32     | 439    | 279   | 349    |

Triangular Exit with Downlight & Strobe 32m. Dimensions in MM

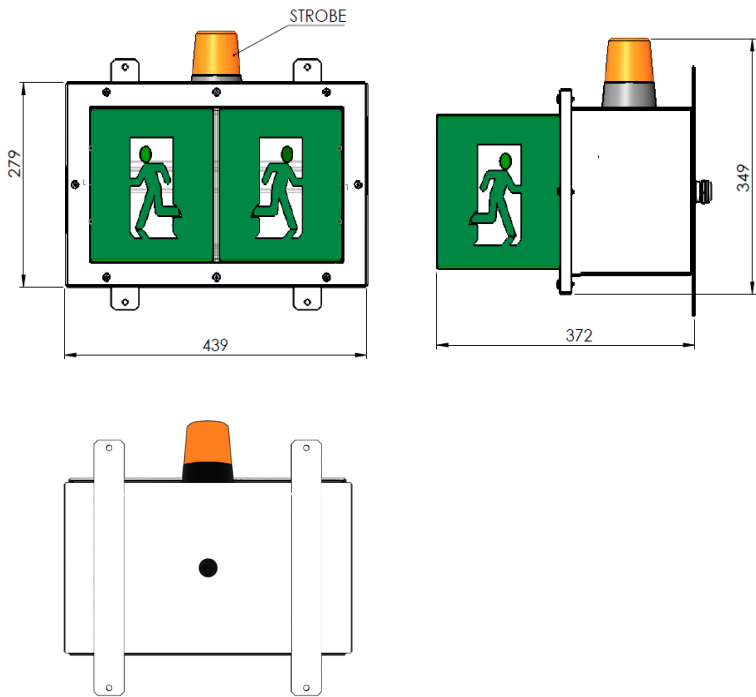

## OPTIONAL ACCESSORIES

- Wall mount brackets (standard)



- Fly lead multi-core cables
- Weidmuller HDC Connectors

## EVOLO Exit with Downlight & Strobe 32m

|                     |   |
|---------------------|---|
| Family Name         | Evolu Emergency   |
| Product Code        | EVOEXL32  |
| Body Colour         | White Powdercoated  |
| Power Rating        | 6.5 W   |
| Power Supply        | 230 V AC  |
| LED Chip            | Samsung/Osram   |
| CCT                 | 4000 K  |
| Ambient Temperature | Ta 40°C   |
| IK Rating           | IK 08   |
| IP Rating           | IP 66   |
| Fitting Weight      | 5.6 kg  |
| Installation        | Wall mount  |
| Applications        | Roads & Rail Tunnels<br>Underpasses   |
| Standards           | AS/NZ 60598 General Requirement and Tests<br>AS/NZ 2293 Emergency Escape Lights |
| Photometric Data    | Available by Request  |



LED light source inside. We do not recommend service or maintenance in situ or on site. To ensure ongoing integrity and functionality LED luminaires shall be serviced or maintained by a competent person in a clean workshop environment free from dust, dirt and moisture.

SPECIFICATIONS MAY BE SUBJECT TO CHANGE